



77.494_03



dim.	product code	Q nom [m ³ /h]
22 mm	UE022XJF	1.25
28 mm	UE028XJF	2.00
Rp 3/4"	UE075XJF	1.25
Rp 1"	UE100XJF	2.00
Rp 1 1/4"	UE125XJF	2.00













Acc.PED (2014/68/EU) §4.3


01




02





>200 mm

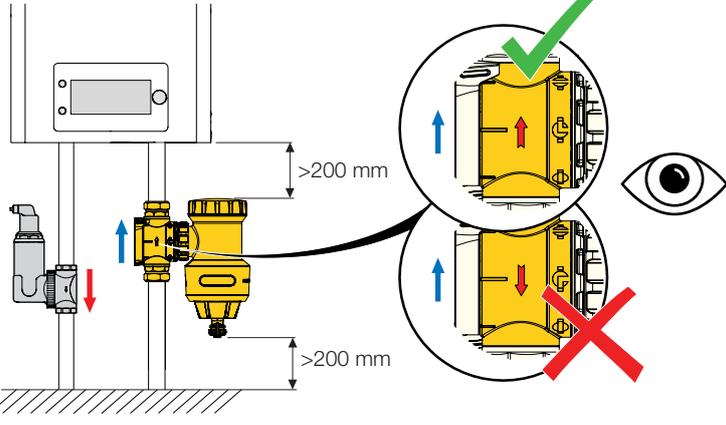




≤ 50% glycol

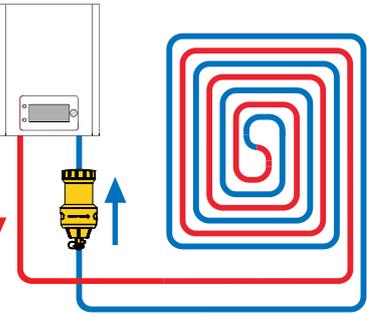


03

Install 




1a =

22 mm
28 mm




1b =

Rp 3/4"
Rp 1"
Rp 1 1/4"



1a


99 mm




1b

32 mm
2 mm
15 mm
15 mm

04

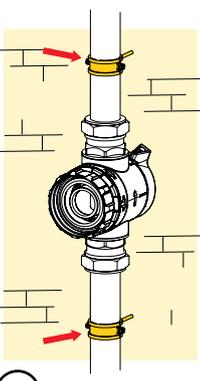


2

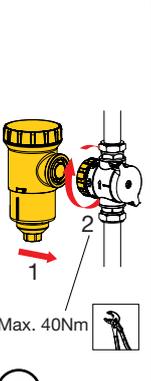


3

Max. 40Nm




4

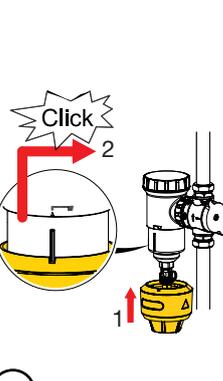


5

Click

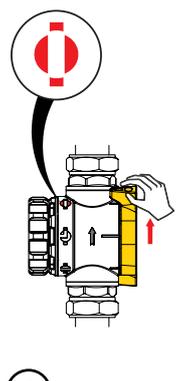


6

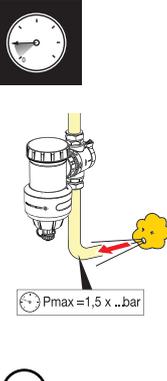

7

Pmax = 1,5 x ...bar

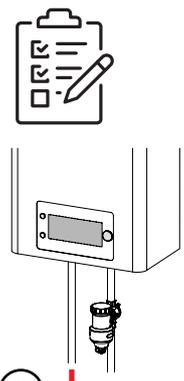

8

05

mm 10 20 30 40 50 60 70 80 90 100

